

**DUC**  
2024

# **TII ENVIRONMENTAL MANAGEMENT ANALYSIS**

dTIMS BA Implementation



Stephen Smyth, TII, Senior Manager – Pavement Assets

Jeff Zavitski, Deighton, Asset Management

# AGENDA

- Transportation Infrastructure Ireland Climate Targets
- TII Active Travel Initiative
- EMS Components on dTIMS BA
- EMS Implementation Progress

# TRANSPORT INFRASTRUCTURE IRELAND: NATIONAL ROADS

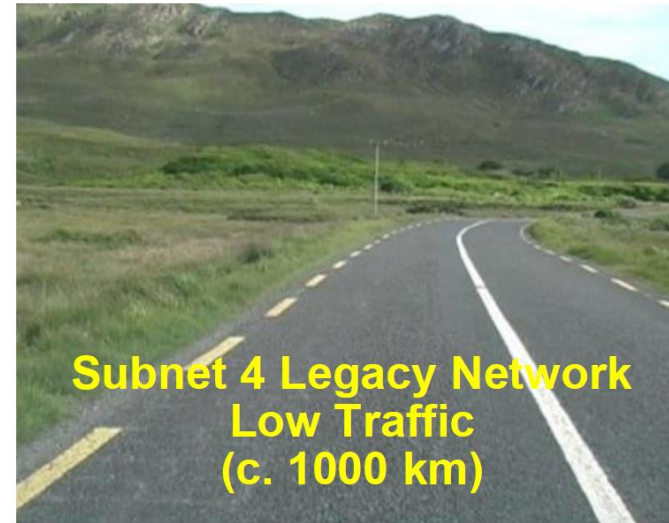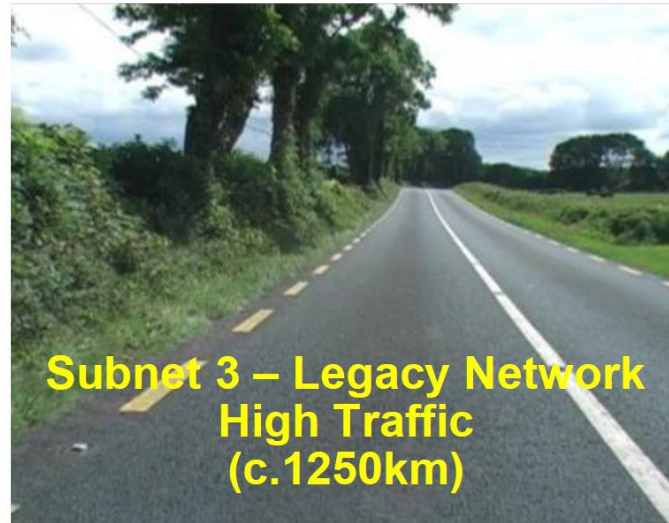


Subnet  
0  
1  
3  
4

Subnet  
2

# TRANSPORT INFRASTRUCTURE IRELAND: ACTIVE TRAVEL




## Existing

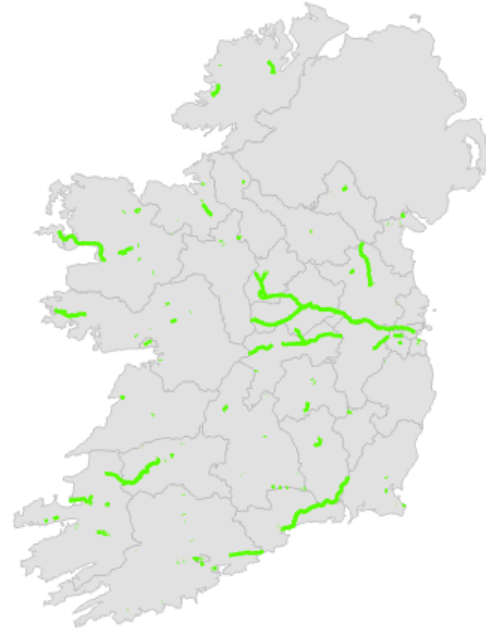


c.900 km Cycleways/Greenways



## Planned

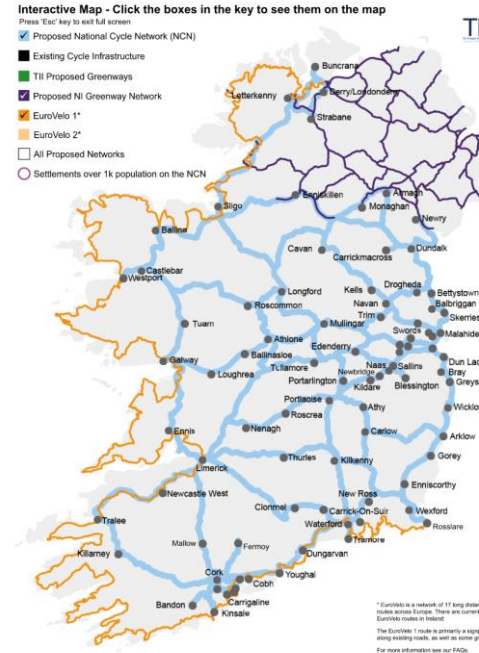

National Cycle Network c.3500km

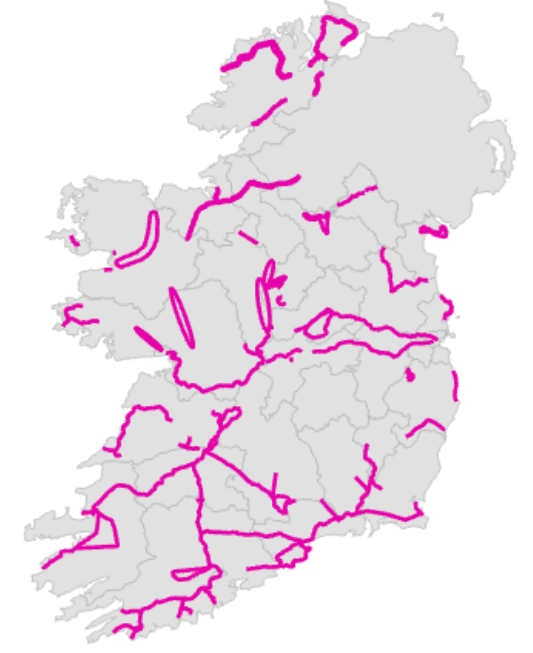


Greenways c. 2500km



# CLIMATE TARGETS

## TII Commitments

- Reduce GHG emissions by 50% by 2030.
- Net zero GHG emissions by 2050.
- Current focus on scope 1 and 2.
- Developing our scope 3 programme.

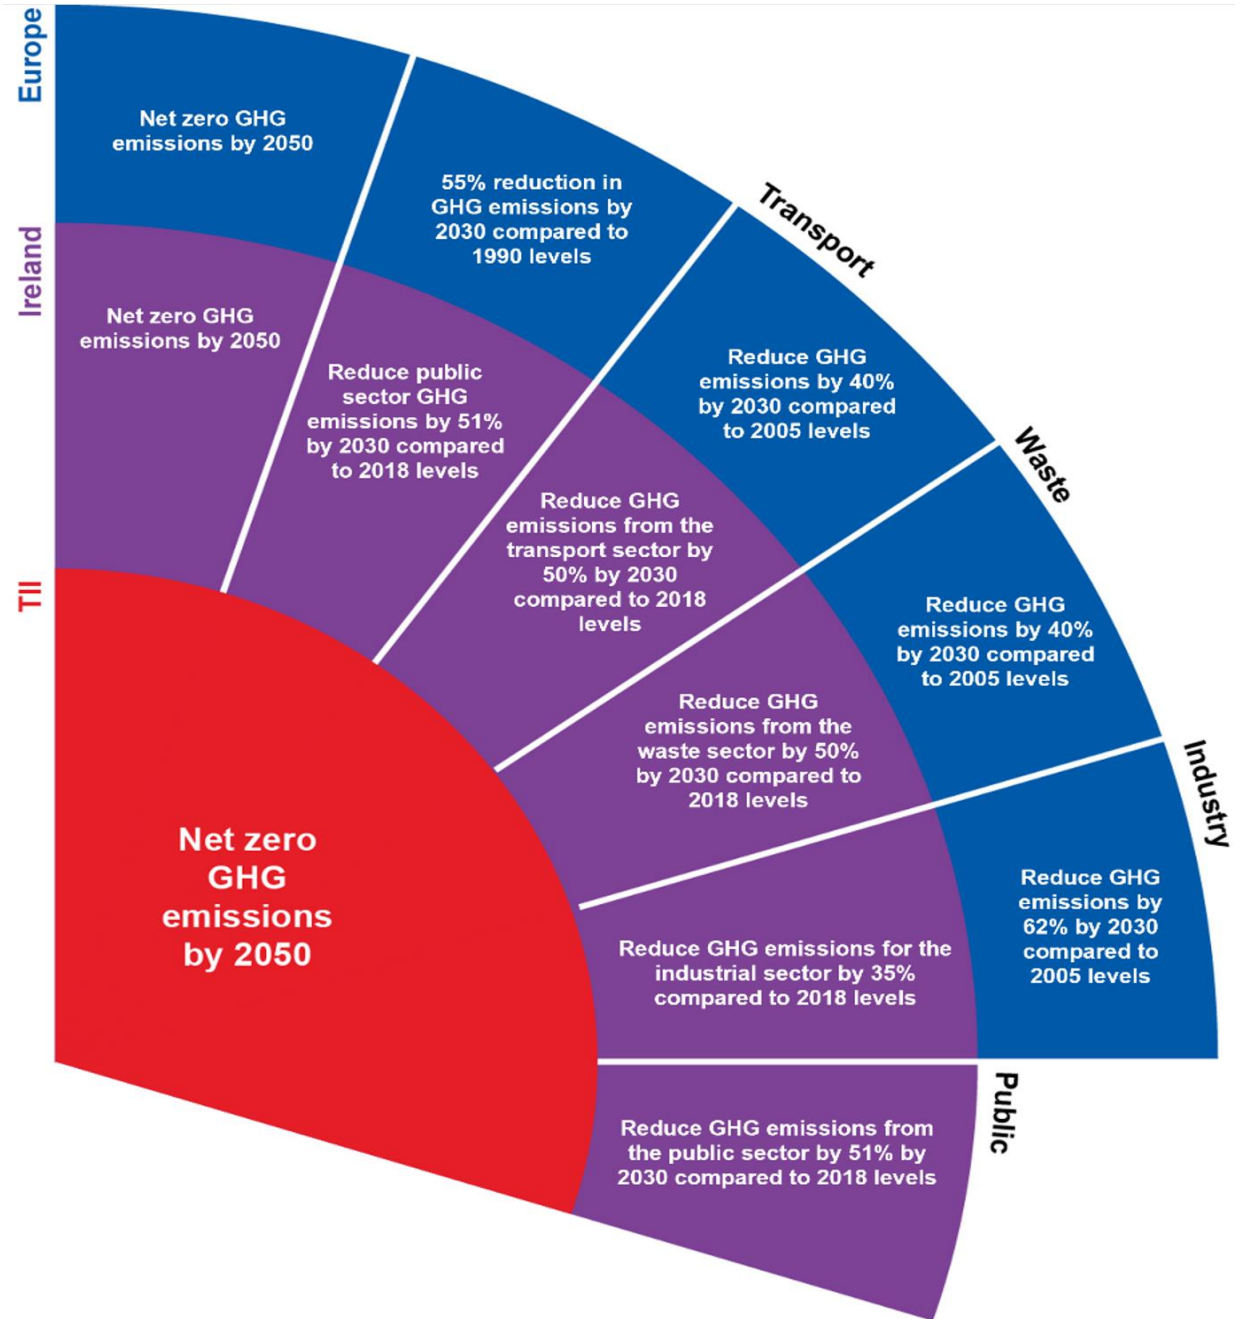

# CLIMATE COMMITMENTS

## Policy, Legislation, Targets



### European Landscape: Climate/Carbon Legislation and Policy

Paris Agreement  
European Green Deal & European Climate Law  
EU Sustainable and Smart Mobility Strategy  
Fit for 55  
Effort Sharing Regulation  
Construction-Specific Strategies and Legislation

### Irish landscape: Climate/Carbon Legislation and Policy

Project Ireland 2040  
National Sustainable Mobility Policy: Action Plan 2022-2025  
Programme for Government – Our Shared Future  
Climate Action and Low Carbon Development (Amendment) Act 2021  
Carbon budgets & Sectoral emission ceiling  
Public Sector Climate Action Mandate  
Climate Action Plan 2023  
Climate Action Plan 2024

### TII commitments

TII Statement of Strategy 2021 to 2025  
TII Sustainability Implementation Plan  
TII Climate Action Roadmap 2022  
National Roads 2040  
TII Circular Economy Policy and Strategy 2023 – 2025  
Overall Strategies & Framework  
Monitoring Frameworks  
Reporting Requirements



Complex body of law/requirements/information

- Strategic
  - Tactical
  - Operational
- } How?

# ENVIRONMENTAL MANAGEMENT IN dTIMS BA




- Allows for the inclusion of Global Warming Potential (GWP) metrics in the dTIMS BA analysis strategic and tactical analysis.
- Allows for the comparison of GWP output from deteriorating pavement infrastructure vs improved pavement infrastructure allowing for offsets due to construction related GWP and construction delay related GWP.
- Traffic related GWP output based upon fuel consumption at operating speed and condition of pavement.

*“Pavement roughness is one of the key contributors to rolling resistance and thus vehicle fuel consumption. Roughness-induced fuel consumption is the result of energy dissipation in the suspension system of vehicles and therefore depends on both road surface characteristics and vehicle dynamic properties.”*

Botshekan, M., Tootkaboni, M. P., & Louhghalam, A. (2019). Global Sensitivity of Roughness-Induced Fuel Consumption to Road Surface Parameters and Car Dynamic Characteristics. *Transportation Research Record*, 2673(2), 183-193. <https://doi.org/10.1177/0361198118821318>

# GLOBAL WARMING POTENTIAL FROM NORMAL OPERATIONS

- All vehicles use energy while traversing the pavement network.
  - Gasoline and Diesel Fuel Vehicles
  - Battery Electric Vehicles (BEV)
  - Plug In Hybrid Vehicles (PIHV)
- Gasoline, Diesel fuel, and electricity are produced with a GWP cost.
  - Gasoline: 2.31 Kg / L
  - Diesel: 2.68 Kg / L
  - Electricity 0.33 Kg / KWh
- Under normal traffic operations (no construction):
  - AADT classified into passenger vehicles and commercial vehicles
  - Passenger Vehicles classified into Carbon, BEV, PIHV
  - Commercial Vehicles classified into Carbon and Electric
  - Fuel Consumption calculated (Distance, Speed, IRI Factor) for all vehicles and total GWP calculated for the analysis element each year.





# GLOBAL WARMING POTENTIAL FROM NORMAL OPERATIONS

- Classifying Traffic to determine Carbon vs Electric vehicles

Vehicle Type	Fuel Source	Fleet %
Cars	Electric	30
	Carbon	70
LGV	Electric	25
	Carbon	75
OGV1	Electric	15
	Carbon	85
OGV2	Electric	10
	Carbon	90
PSV	Electric	20
	Carbon	80

TII Pavement Renewals Business Case  
Pavement Renewals Programme 2023 - 2027  
July 2023 (Issue 1)

# GLOBAL WARMING POTENTIAL FROM NORMAL OPERATIONS

- Calculating Fuel Consumption - Equation Supplied by TII as follows:

<b>Fuel Consumption Function</b>	$L = a/v + b + c*v + d*v^2$ <p>Where:            L = consumption (litre/km)            v = average speed (km/hr)            a, b, c, and d = fuel consumption parameters</p>
----------------------------------	--

	a	b	c	D
Petrol Car	0.5155	0.06767	-0.0007362	0.000005619
Diesel Car	0.4229	0.06613	-0.0006266	0.000004798
Electric Car <sup>3</sup>		0.221		
Petrol LGV	0.2535	0.2081	-0.0033072	0.0000212
Diesel LGV	0.218	0.13917	-0.0023135	0.000018692
Electric LGV		0.259		
OGV1	2.5876	0.11176	-0.0006445	0.000009922
OGV2	5.0715	0.34664	-0.0027069	0.000014479

TII Project Appraisal Guidelines Unit 6.11 –  
 National Parameters Values Sheet  
 PE-PAG-02030  
 December 2023

# GLOBAL WARMING POTENTIAL FROM NORMAL OPERATIONS

- Determining Impact of Pavement Roughness (IRI in m/km) on Fuel Consumption:

Fuel Consumption Factor based on Increasing Roughness (IRI)					
	Cars		Trucks		
IRI	0-20 Km/h	20-140 Km/h	0-20 Km/h	20-60 Km/h	60-80 Km/h
1	1.00	1.00	1.00	1.00	1.00
2	1.02	1.02	1.03	1.05	1.04
3	1.04	1.04	1.06	1.10	1.08
4	1.06	1.05	1.09	1.15	1.12
5	1.08	1.07	1.12	1.20	1.16
6	1.10	1.09	1.15	1.25	1.20

National Academies of Sciences, Engineering, and Medicine. 2012.  
*Estimating the Effects of Pavement Condition on Vehicle Operating Costs.*  
Washington, DC: The National Academies Press. <https://doi.org/10.17226/22808>.

# GLOBAL WARMING POTENTIAL FROM NORMAL OPERATIONS

GWP Do-Nothing Calculations					
Item	Year 1	Year 2	Year 3	Calculation	Source
Segment Length (km)	1.25	1.25	1.25	Pavement Segment Data	PMS
Operating Speed PV	80.00	80.00	80.00	Pavement Segment Data	PMS
Operating Speed CV	60.00	60.00	60.00	Pavement Segment Data	PMS
Total AADT	1800.00	1818.00	1836.18	Pavement Segment Data - with annual growth rate	PMS
Passenger Vehicle AADT	1584.00	1599.84	1615.84	Calculated by subtracting CV from total AADT	PMS
Passenger Vehicle AADT - Carbon	1108.80	1123.45	1138.26	Calculated by subtracting BEV, and PIHV from PV AADT	PMS
Passenger Vehicle AADT - BEV	380.16	381.11	382.06	80 % of 30% passenger traffic and increases at 0.25% each year	TII Pavement Renewals Business Case July 2023, Table 5.8
Passenger Vehicle AADT - PIHV	95.04	95.28	95.52	20 % of 30% passenger traffic and increases at 0.25% each year	TII Pavement Renewals Business Case July 2023, Table 5.8
Commercial Vehicle AADT	216.00	218.16	220.34	Pavement Segment Data - with annual growth rate	PMS
Large Good Vehicle - Carbon	85.86	86.72	87.59	53 percent of total truck traffic and 75 percent carbon	TII Pavement Renewals Business Case July 2023, Table 5.4 and Table 5.8
Large Good Vehicle - Electric	28.62	28.91	29.20	53 percent of total truck traffic and 25 percent electric	TII Pavement Renewals Business Case July 2023, Table 5.4 and Table 5.8
Other Goods Vehicles - Carbon	34.56	34.91	35.25	20 percent of total truck traffic and 80 percent carbon	TII Pavement Renewals Business Case July 2023, Table 5.4 and Table 5.8
Other Goods Vehicles - Electric	8.64	8.73	8.81	20 percent of total truck traffic and 20 percent electric	TII Pavement Renewals Business Case July 2023, Table 5.4 and Table 5.8
Other Goods Vehicles 2 - Carbon	38.88	39.2688	39.66149	20 percent of total truck traffic and 90 percent carbon	TII Pavement Renewals Business Case July 2023, Table 5.4 and Table 5.8
Other Goods Vehicles 2 - Electric	4.32	4.3632	4.406832	20 percent of total truck traffic and 10 percent electric	TII Pavement Renewals Business Case July 2023, Table 5.4 and Table 5.8
Public Service Vehicles - Carbon	12.096	12.21696	12.33913	7 percent of total truck traffic and 80 percent carbon	TII Pavement Renewals Business Case July 2023, Table 5.4 and Table 5.8
Public Service Vehicles - Electric	3.024	3.05424	3.084782	7 percent of total truck traffic and 20 percent electric	TII Pavement Renewals Business Case July 2023, Table 5.4 and Table 5.8
Fuel Consumption - PV Carbon	5.12	5.12	5.12	L/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - PV BEV	22.10	22.10	22.10	KWh/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - PV PIHV	22.10	22.10	22.10	KWh/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - LGV - Carbon	7.13	7.13	7.13	L/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - LGV - Electric	25.90	25.90	25.90	KWh/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - OGV1 - Carbon	15.19	15.19	15.19	L/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - OGV1 - Electric	25.90	25.90	25.90	KWh/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - OGV2 - Carbon	32.09	32.09	32.09	L/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - OGV2 - Electric	25.90	25.90	25.90	KWh/100km - Using Speed and TII Fuel Consumption Equation	Project Appraisal Guidelines Unit 6.11 - National Parameters Values Sheet, PE-PAG-02030, December 2023
Fuel Consumption - PSV - Carbon	28.61	28.61	28.61	L/100km - Using Speed and TII Fuel Consumption Equation	Calculated using OVG2 parameters but speed limit of PV
Fuel Consumption - PSV - Electric	100.00	100.00	100.00	KWh/100km - Using Speed and TII Fuel Consumption Equation	Default value from Internet, no TII source for PSV EV fuel consumption
GWP (Kg) per liter of Gasoline	2.31	2.31	2.31	Kg	<a href="https://www.seai.ie/data-and-insights/seai-statistics/conversion-factors/">https://www.seai.ie/data-and-insights/seai-statistics/conversion-factors/</a>
GWP (Kg) per liter of Diesel	2.68	2.68	2.68	Kg	<a href="https://www.seai.ie/data-and-insights/seai-statistics/conversion-factors/">https://www.seai.ie/data-and-insights/seai-statistics/conversion-factors/</a>
GWP (Kg) per KWh	0.33	0.33	0.33	Kg	<a href="https://www.seai.ie/data-and-insights/seai-statistics/conversion-factors/">https://www.seai.ie/data-and-insights/seai-statistics/conversion-factors/</a>
IRI	2.00	2.27	2.54	Pavement Segment Data	PMS
Fuel Consumption Factor - PV	1.00	1.02	1.02	Calculated using IRI and lookup table SYS_LOOKUP_FUEL_IRI_FACTOR	NCHRP Report 720: Estimating the Effects of Pavement Condition on Vehicle Operating Costs
Fuel Consumption Factor - CV	1.00	1.05	1.05	Calculated using IRI and lookup table SYS_LOOKUP_FUEL_IRI_FACTOR	NCHRP Report 720: Estimating the Effects of Pavement Condition on Vehicle Operating Costs
GWP - PV Carbon	163.93	169.42	171.65	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - PV BEV	34.87	35.65	35.74	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - PV PIHV	8.72	8.91	8.94	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - LGV - Carbon	20.53	21.77	21.99	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - LGV - Electric	3.08	3.26	3.29	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - OGV1 - Carbon	17.61	18.68	18.86	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - OGV1 - Electric	0.93	0.98	0.99	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - OGV2 - Carbon	41.84	44.37	44.82	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - OGV2 - Electric	0.46	0.49	0.50	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - PSV - Carbon	11.61	12.31	12.43	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP - PSV - Electric	1.25	1.33	1.34	Kg Calculated based on segment length, count, Fuel Consumption, GWP	Calculated
GWP Total	304.82	317.18	320.56	Summation of GWP for each vehicle type / fuel	Calculated

# GLOBAL WARMING POTENTIAL FROM CONSTRUCTION

- Pavement projects completed on the pavement segment incur a GWP cost from the various stages of a construction project:
  - Material Production (kg/m<sup>2</sup>)
  - Manufacturing and Mixture (kg/m<sup>2</sup>)
  - Transportation of material to site (kg/m<sup>2</sup>)
  - Placement (kg/m<sup>2</sup>)
  - Demolition (kg/m<sup>2</sup>)
  - Recycling credit (kg/m<sup>3</sup>)

# GLOBAL WARMING POTENTIAL FROM CONSTRUCTION

- TII has provided default thicknesses and productivity rates for each dTIMS BA Treatment Type:

Sub-Network	Treatment	Default Layer Thicknesses (mm) for TII Treatment Types					Total Bit	Productivity (m2/day)	Comment
		Surface Course	Binder Course	Base	Sub-base	(m2/day)			
0 - Motorway	Reconstruction	40	60	150	150	250	844		
0 - Motorway	Strengthen	40	60	75	n/a	175	1125		
0 - Motorway	Overlay	40	60	n/a	n/a	100	1688		
0 - Motorway	Replenish Surface	50	n/a	n/a	n/a	50	3375	based on 900 lane m per day	
1 - Other Engineered Pavement	Reconstruction	40	60	150	150	250	563		
1 - Other Engineered Pavement	Strengthen	40	60	75	n/a	175	750		
1 - Other Engineered Pavement	Overlay	40	60	n/a	n/a	100	1125		
1 - Other Engineered Pavement	Replenish Surface	50	n/a	n/a	n/a	50	2250		
2 - Urban Areas	Reconstruction	40	60	150	150	250	375		
2 - Urban Areas	Strengthen	40	60	75	n/a	175	500		
2 - Urban Areas	Overlay	40	60	n/a	n/a	100	750		
2 - Urban Areas	Replenish Surface	50	n/a	n/a	n/a	50	1500	based on 400 lane m per day	
3 - Legacy Pavements High Traffic	Reconstruction	40	60	100	150	200	563		
3 - Legacy Pavements High Traffic	Strengthen	40	60	50	n/a	150	750		
3 - Legacy Pavements High Traffic	Overlay	40	60	n/a	n/a	100	1125		
3 - Legacy Pavements High Traffic	Replenish Surface	50	n/a	n/a	n/a	50	2250	based on 600 lane m per day	
4 - Legacy Pavements Low Traffic	Reconstruction	40	60	100	150	200	563		
4 - Legacy Pavements Low Traffic	Strengthen	40	60	50	n/a	150	750		
4 - Legacy Pavements Low Traffic	Overlay	40	60	n/a	n/a	100	1125		
4 - Legacy Pavements Low Traffic	Replenish Surface	50	n/a	n/a	n/a	50	2250	based on 600 lane m per day	

# GLOBAL WARMING POTENTIAL FROM CONSTRUCTION

- TII has also provided GWP Costs for each dTIMS BA Treatment Type:

SubNetwork	Treatment	Demolition_GWP_Cost	Manufacturing_GWP	Material_Production_GWP	Placement_GWP_COST	Recycling_GWP_Credit	Transportation_GWP	Treatment_GWP_Cost
0 - Motorway	Overlay	1.54	3.503	1.433	0.061	17.08	1.433	0
0 - Motorway	Reconstruction	0	58.64	12.895	1.14	17.08	12.895	68.49
0 - Motorway	Replenish_Surface	0.77	1.7515	0.7165	0.0305	0	0.7165	3.985
0 - Motorway	Strengthen	5.648	11.96	5.25	0.222	17.08	5.254	11.254
1 - Other Engineered Pavement	Overlay	1.54	3.503	1.433	0.061	17.08	1.433	0
1 - Other Engineered Pavement	Reconstruction	0	58.64	12.895	1.14	17.08	12.895	68.49
1 - Other Engineered Pavement	Replenish_Surface	0.77	1.7515	0.7165	0.0305	0	0.7165	3.985
1 - Other Engineered Pavement	Strengthen	5.648	11.96	5.25	0.222	17.08	5.254	11.254
2 - Urban Areas	Overlay	1.54	3.503	1.433	0.061	17.08	1.433	0
2 - Urban Areas	Reconstruction	0	58.64	12.895	1.14	17.08	12.895	68.49
2 - Urban Areas	Replenish_Surface	0.77	1.7515	0.7165	0.0305	0	0.7165	3.985
2 - Urban Areas	Strengthen	5.648	11.96	5.25	0.222	17.08	5.254	11.254
3 - Legacy Pavements High Traffic	Overlay	1.54	3.503	1.433	0.061	17.08	1.433	0
3 - Legacy Pavements High Traffic	Reconstruction	0	58.64	12.895	1.14	17.08	12.895	68.49
3 - Legacy Pavements High Traffic	Replenish_Surface	0.77	1.7515	0.7165	0.0305	0	0.7165	3.985
3 - Legacy Pavements High Traffic	Strengthen	5.648	11.96	5.25	0.222	17.08	5.254	11.254
4 - Legacy Pavements Low Traffic	Overlay	1.54	3.503	1.433	0.061	17.08	1.433	0
4 - Legacy Pavements Low Traffic	Reconstruction	0	58.64	12.895	1.14	17.08	12.895	68.49
4 - Legacy Pavements Low Traffic	Replenish_Surface	0.77	1.7515	0.7165	0.0305	0	0.7165	3.985
4 - Legacy Pavements Low Traffic	Strengthen	5.648	11.96	5.25	0.222	17.08	5.254	11.254

# GLOBAL WARMING POTENTIAL FROM CONSTRUCTION RELATED DELAYS

- While construction is taking place, traffic is delayed. TII has two major traffic control practices for construction and limits the work zones to 500m at a time.
  - Signals
  - Pilot Vehicles
- TII has provided the following table for use in calculating traffic delay where figures indicate minutes of delay for each vehicle between the hours indicated. Since the work zones are so short, Deighton has calculated the GWP delay assuming the vehicles are at Idle for the time indicated.

	AM	AM	AM Peak	Interpeak	Interpeak	PM Peak	PM	PM
Subnet	12am to 3am	3am to 6am	6am to 9am	9am to 12 pm	12pm to 3pm	3pm to 6 pm	6pm to 9pm	9pm to 12am
1&2	0.3	0.3	9.1	4.7	4.7	9.1	4.7	0.3
3&4	0.3	0.3	9.1	4.1	4.1	7.1	4.7	0.3
	Min	Min	Max	Average	Average	Max	Average	Min

- For subnetwork 0 (Motorways) diversions or detours with given lengths are used to calculate additional GWP over the diversion distance.



# GLOBAL WARMING POTENTIAL FROM CONSTRUCTION RELATED DELAYS

- Delay time in minutes considered to be time where vehicle is idling and these fuel consumption figures for idling will be used.

Vehicle Class	Engine	Gallons at Idle / Hour	Liters at Idle / Hour	Liters at Idle / Minute
Passenger Vehicle AADT - Carbon	Gasoline	0.16	0.61	0.01
Passenger Vehicle AADT - BEV	Battery	0.00	0.00	0.00
Passenger Vehicle AADT - PIHV	Hybrid	0.00	0.00	0.00
Large Good Vehicle - Carbon	Diesel	0.64	2.42	0.04
Large Good Vehicle - Electric	Battery	0.00	0.00	0.00
Other Goods Vehicles - Carbon	Diesel	0.84	3.18	0.05
Other Goods Vehicles - Electric	Battery	0.00	0.00	0.00
Other Goods Vehicles 2 - Carbon	Diesel	0.84	3.18	0.05
Other Goods Vehicles 2 - Electric	Battery	0.00	0.00	0.00
Public Service Vehicles - Carbon	Diesel	0.97	3.67	0.06
Public Service Vehicles - Electric	Battery	0.00	0.00	0.00

Argonne National Library  
Idle Reduction Savings Calculator  
<https://www.anl.gov/taps/reference/vehicle-idle-reduction-savings-worksheet-pdf>

# GLOBAL WARMING POTENTIAL FROM CONSTRUCTION RELATED DELAYS

- To calculate the GWP delay cost during construction, the following methodology is used:
  - Traffic Volume in each vehicle class (PV / CV / Carbon / Electric) is split into 8 time periods of 3 hours each using an hourly traffic volume distribution.
  - Minutes of delay per vehicle is assigned based upon traffic control type (Diversion / Signals / Pilot Vehicle)
  - Fuel Consumption per vehicle class is assigned
  - Project Duration is calculated
  - Total delay calculated as  $\text{Volume} * \text{Minutes} * \text{Fuel Consumption} * \text{GWP/L} * \text{Duration}$  for each vehicle class and each 3-hour period

Argonne National Library  
Idle Reduction Savings Calculator  
<https://www.anl.gov/taps/reference/vehicle-idle-reduction-savings-worksheet-pdf>

Traffic Calculations	0 to 3am	3 to 6 am	6 to 9 am	9 to 12 pm	12 to 3pm	3 to 6 pm	6 to 9pm	9 to 12am
Percent Per Hour	0.33	4.00	8.00	5.00	5.00	7.00	3.00	1.00
Number of Hours in Period	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00
Percent of Total AADT	1.00	12.00	24.00	15.00	15.00	21.00	9.00	3.00
Number of Hours in Period	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00
GWP (Kg) per liter of Gasoline	2.31	2.31	2.31	2.31	2.31	2.31	2.31	2.31
GWP (Kg) per liter of Diesel	2.68	2.68	2.68	2.68	2.68	2.68	2.68	2.68
GWP (Kg) per KWh	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33
Passenger Vehicle AADT - Carbon	393.76	4725.15	9450.31	5906.44	5906.44	8269.02	3543.86	1181.29
Passenger Vehicle AADT - BEV	9.74	116.91	233.82	146.14	146.14	204.59	87.68	29.23
Passenger Vehicle AADT - PIHV	2.44	29.23	58.46	36.53	36.53	51.15	21.92	7.31
Large Good Vehicle - Carbon	8.55	102.64	205.27	128.29	128.29	179.61	76.98	25.66
Large Good Vehicle - Electric	2.85	34.21	68.42	42.76	42.76	59.87	25.66	8.55
Other Goods Vehicles - Carbon	3.44	41.31	82.62	51.64	51.64	72.30	30.98	10.33
Other Goods Vehicles - Electric	0.86	10.33	20.66	12.91	12.91	18.07	7.75	2.58
Other Goods Vehicles 2 - Carbon	3.87	46.48	92.95	58.10	58.10	81.33	34.86	11.62
Other Goods Vehicles 2 - Electric	0.43	5.16	10.33	6.46	6.46	9.04	3.87	1.29
Public Service Vehicles - Carbon	1.20	14.46	28.92	18.07	18.07	25.30	10.84	3.61
Public Service Vehicles - Electric	0.30	3.61	7.23	4.52	4.52	6.33	2.71	0.90
Subnetwork	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Construction Type	Signals	Signals	Signals	Signals	Signals	Signals	Signals	Signals
Minutes of Delay / Vehicle / Day	0.28	0.28	9.08	4.06	4.06	7.06	4.68	0.28
Treatment Duration	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00
Passenger Vehicle Carbon - L/min	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Passenger Vehicle BEV - L / Min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Passenger Vehicle - PIHV L/Min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Large Good Vehicle - Carbon - L/Min	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
Large Good Vehicle - Electric - KWh/Min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Goods Vehicles - Carbon - L/Min	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Other Goods Vehicles - Electric - KWh/Min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Goods Vehicles 2 - Carbon - L/Min	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Other Goods Vehicles 2 - Electric - KWh/Min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Public Service Vehicles - Carbon - L/Min	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06
Public Service Vehicles - Electric - KWh/Min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Passenger Vehicle Carbon - Delay GWP Kg	45.47	545.64	36036.75	10060.16	10060.16	24500.90	6961.50	136.41
Passenger Vehicle BEV - Delay GWP Kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Passenger Vehicle PIHV - Delay GWP Kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Large Good Vehicle - Carbon - Delay GWP Kg	4.59	55.04	3635.02	1014.77	1014.77	2471.40	702.21	13.76
Large Good Vehicle - Electric - Delay GWP Kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Goods Vehicles - Carbon - Delay GWP Kg	2.42	29.08	1920.39	536.10	536.10	1305.64	370.98	7.27
Other Goods Vehicles - Electric - Delay GWP Kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Goods Vehicles 2 - Carbon - Delay GWP Kg	2.73	32.71	2160.43	603.12	603.12	1468.85	417.35	8.18
Other Goods Vehicles 2 - Electric - Delay GWP Kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Public Service Vehicles - Carbon - Delay GWP Kg	0.98	11.75	776.16	216.67	216.67	527.70	149.94	2.94
Public Service Vehicles - Electric - Delay GWP Kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Total Delay Cost GWP kg</b>	<b>109,165.79</b>							

← Percentages and GWP Costs

← Traffic Volume Distribution

← Minutes of Delay and Traffic Control Type

← GWP Per Period Per Vehicle Class

# GWP IN THE PAVEMENT ANALYSIS

- GWP in the Analysis :
  - Do Nothing GWP calculated based on increasing traffic and deteriorating pavement condition
  - For each treatment within a strategy:
    - GWP Treatment Cost added to GWP variable to account for GWP output from construction
    - GWP Delay Cost added to GWP variable to account for GWP output from construction delay
    - Pavement Conditions are reset (IRI is reduced)
    - GWP after treatment calculated based on reset IRI
- GWP variable can be included in the benefit model or can be output to use in scenario comparisons and project comparisons.

**GWP OUTPUT - TO BE COMPLETED CLOSER TO DUC WHEN ANALYSIS IS COMPLETED**

**GWP OUTPUT - TO BE COMPLETED CLOSER TO DUC WHEN ANALYSIS IS COMPLETED**

**GWP OUTPUT - TO BE COMPLETED CLOSER TO DUC WHEN ANALYSIS IS COMPLETED**

# IMPLEMENTATION PROJECT PROGRESS

- Solution Design has been completed
- Solution Implementation is in progress
- Solution Delivery and Training will take place following DUC 2024



# QUESTIONS TO THE PRESENTERS?

